info@matchav.nl
www.matchav.nl

SIMPLE WAY

Prijslijst september 2022

Product	Prijzen excl. btw	Product	Prijzen excl. btw
D1 mini mono DI-box	€ 144.00	Vacuum Tube Pre-amp stereo	€ 2066.00
D2 stereo DI-box	€ 326.00	Hi-End DI-box	€ 279.00
D8 8-channel rack-mountable	€ 1480.00	GB guitar buffer	€ 96.00
J1 mini mono DI-box	€ 154.00	Mic Preamp	€ 112.00
J2 stereo DI-box	€ 335.00	MicOne	€ 2066.00
J8 8-channel rack-mountable	€ 1400.00		

Discrete Direct Box Line

D1-mini Mono Active Direct Box

D2- Stereo Active Direct Box

Hi-End Direct Box

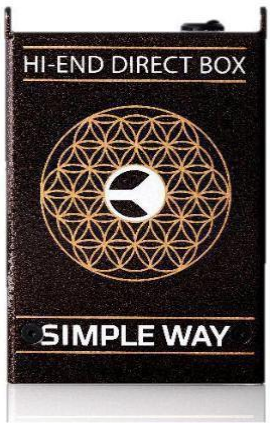

Technische specificaties

- **Input impedance:** >4,7 MOhm
- **Input impedance with PAD enabled:** 47 kOhm
- **PAD reduction:** 20dB
- **Unbalanced noise level (10-20kHz):** <-100dBu
- **Non linear distortion, PAD enabled:** (-20dB, guitar) : <0.001%
- **Non linear distortion, input level at 0dBu, at 1kHz:** <0.003% (typically <0.002%)
- **Non linear distortion, input level at 0dBu, at 100Hz:** <0.006% (typically <0.004%)
- **Max input level (<3% distortion):** >+8dBu
- **Max input level with PAD enabled:** (<3% distortion): >+28dBu
- **Balanced output (XLR) impedance:** <8 Ohm
- **Unbalanced output (Jack) impedance:** 1 kOhm
- **Dimensions:** 120mm x 50mm x 42mm
- **Weight:** 0,17kg

MATCH audio & vision

info@matchav.nl
www.matchav.nl

SIMPLE WAY

Buffer's & Preamp's

Active Guitar Buffer

Mic Preamp

Specifications
Transmission ratio 1:1
Input resistance : >= 4mOhm
Output resistance : <= 10 Ohm
Harmonics coefficient : (0 dBu, U — 12B) <= 0,002%
Overload ability (Harmonics coefficient < 1%)
With 12V power : >= +12dBu
With 9V power : >= +8dBu

Specifications
Gain : +6dB/+20dB, switchable
Input Impedance : 4.7 Kohm
Output Impedance : < 40 Ohm
THD : 0.002% @ 1kHz, input signal up to 30mV (-28dBu), gain set to +20dB
THD : 0.03% @ 1kHz, input signal up to 100mV (-18dBu), gain set to +6dB
CMRR : > 65 dB
Signal-to-Noise Ratio : 70 dB @ 1mV input signal
Power Requirements : +48V phantom power, 4 – 6 mA

Microphones

MicOne & Power Supply

MATCH audio & vision